



MNMS21.5EX2

双砂辊碾米机

DOUBLE EMERY ROLL WHITENER



湖北永祥粮食机械股份有限公司

HUBEI YONGXIANG FOOD PROCESSING MACHINE CO.,LTD.

碾米机械 永祥制造



用途简介

MNMS21.5EX2 双砂辊碾米机是永祥根据目前国内外稻米加工实际情况，结合本公司长期研发碾米机的成熟经验，采用现代机械制造工艺和国际化元件配置，精心设计、制造的碾米机升级产品，该机采用双辊阶梯布局并联使用的结构方式，具有造型美观，结构紧凑，自动化程度高，产量大、精度高、占地面积小，维修方便、进料方式灵活等特点，主要用于糙米开糙和糙米碾白。是现代大中型优质米厂升级换代理想的配套米机。

产品特点

- 整体机架设计，机械结构稳定牢固;
- 双辊采用阶梯结构布局并联使用，产量大，占地面积小;
- 采用强负压碾米，精度高，碎米少，排糠能力强;
- 出米口拨米辊设计，出料更畅通;
- 电流和负压数字化显示，易观察，操作更方便;
- 配备进料急停装置，能有效防止闷机现象;
- 多转速设计，适于加工不同品种的原粮;
- 多方位排糠设计，配套更方便;
- 双电机驱动，性能更稳定;

USE INTRODUCTION

MNMS21.5EX2 Double sand roller rice mill is a rice mill upgrade product designed and manufactured by Yongxiang according to the actual situation of rice processing at home and abroad, combined with the company's mature experience in long-term research and development of rice mill, using modern machinery manufacturing technology and international component configuration. The machine adopts the structure of double roller layout and parallel use, which has beautiful appearance, compact structure and high degree of automation. Large output, high precision, small footprint, easy maintenance, flexible feeding methods, etc., mainly used for brown rice rough and brown rice grinding white. It is an ideal supporting rice machine for upgrading modern large and medium-sized high-quality rice factories.

FEATURES

- Overall frame design, stable and firm mechanical structure.
- Double roller adopts upper and lower structure layout parallel use, large output, small footprint;
- Adopt strong negative pressure milling, high precision, less broken rice, strong ability to remove bran.
- The design of the rice feeding roller at the outlet makes the discharging smoother.
- Digital display of current and negative pressure, easy to observe and more convenient to operate.
- Equipped with feeding emergency stop device, can effectively prevent the phenomenon of sealing machine.
- Multi-speed design, suitable for processing different varieties of raw grains.
- Multi-directional bran removal design, more convenient supporting.
- Double motor drive, more stable performance.

主要技术参数 MAIN TECHNICAL DATA

型号 Type	MNMS21.5EX2	转速 Rotary speed(rpm)	1100-1290
处理量 Output(t/h)	8-10	吸风量 Air volume(m³/min)	45-60
配备动力 Power(kw)	30X2/45X2	负压 Negative pressure(mmH₂O)	250-350

产品技术参数如有变更恕不另行通知 If technologic data has been changed without further information


通过ISO9001国际标准质量体系认证 ISO 9001 -2008 Certified

E-mail:yongxiangmiji@sohu.com http://www.hbyxjlj.com

地址：湖北省安陆市府河大道2号

ADD: 2 FUHE AVE.,ANLU CITY,HUBEI,CHINA

电话(TEL): 0712-5254443 5254445 5258762 传真(FAX):0712-5254443 邮编(POSTCODE): 432600

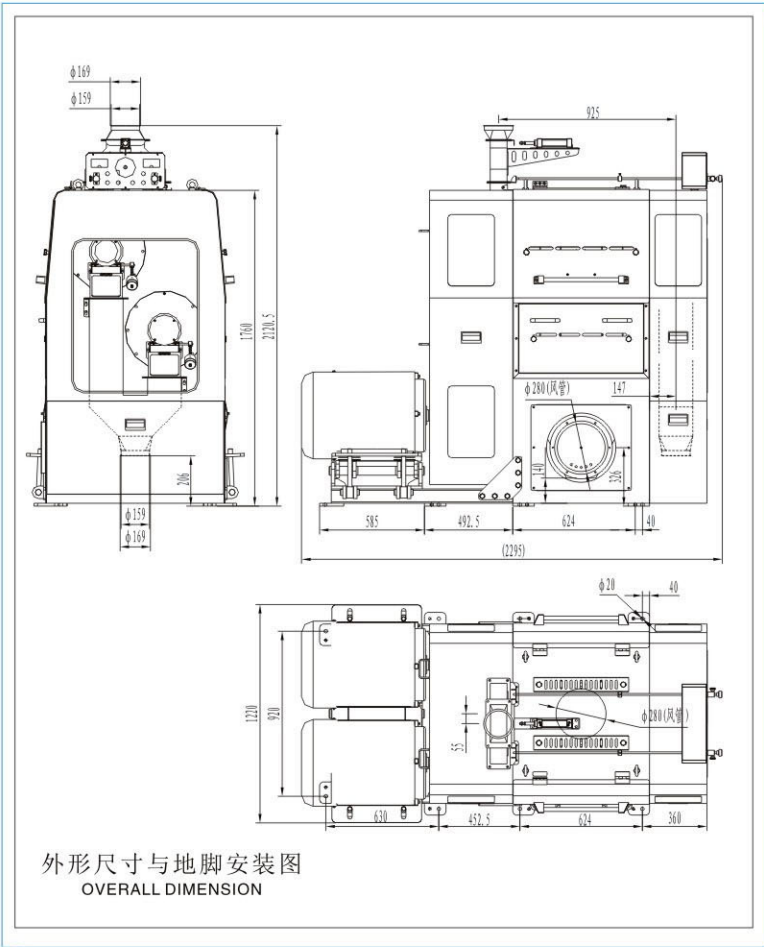

永祥官网



微信公众号